


Fines recovery systems

The CDI B and F ranges are designed to offer flexibility and work with our CDI ST range of screening machinery fitted with the washing equipment option. The B Range offers an affordable entry level to sand recovery from washed aggregate with very low running and maintenance costs. The F range is more advanced and can extract fines particles as small as 40 micron with high very efficiency. Each F machine is designed specifically to suit each individual application.

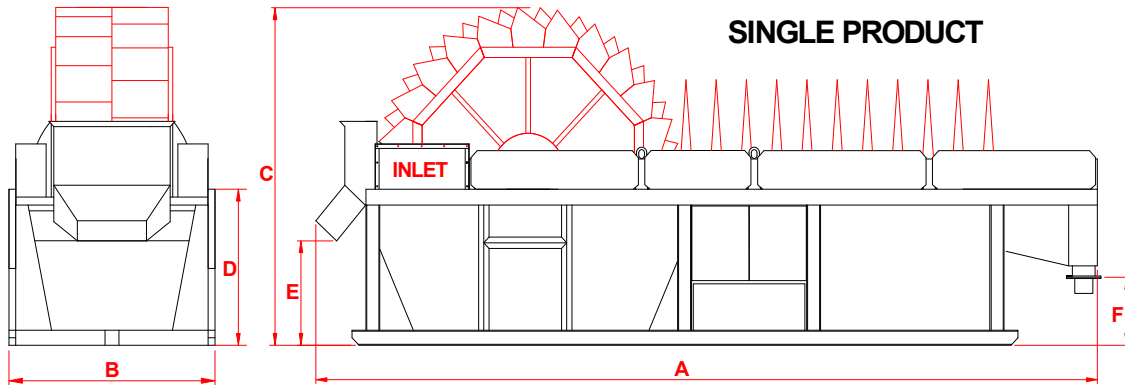

- Applications**
- Coarse Sand.
 - Fine Sand.
 - Silt Recovery.

DIMENSIONS:


| MODEL | A | B | C | D | E | F |
|-------------|------|------|------|------|------|-----|
| B 7 | 6900 | 2300 | 3400 | 1610 | 1190 | 820 |
| B 12 | 8600 | 2600 | 3400 | 1580 | 1050 | 690 |

B - RANGE



SPECIFICATIONS:

| MODEL | B 6T | B 7 | B 12 |
|-----------------|-------------|-------------|--------------|
| Dry weight | 5 Tonne | 6 Tonne | 7.6 Tonne |
| Output range | 40-60 TPH | 40-70 TPH | 80-120 TPH |
| Electric Power | 5.5 Kw | 5.5 Kw | 7.5 Kw |
| Wheel Diameter | 2740 | 3350 | 3350 |
| Bucket Qty x W | 24 x 610 | 20 x 750 | 40 x 750 |
| Spiral Diameter | 2130 | 2130 | 2400 |
| Tank Capacity | 7600 Litres | 9000 Litres | 14000 Litres |

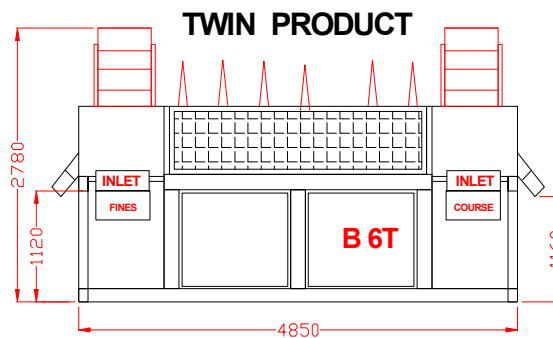

F - RANGE CYCLONE TECHNOLOGY



The CDI F-Range offer sand processing solutions that utilize cyclone, pump and dewatering technology to produce specification sands and are capable of recovering all saleable sand coarser than 40 micron therefore increasing sand production, increasing plant capacity and reducing settling pond maintenance costs.

Nearest Dealer / Agent:
Contact CDI for details.
(currently enlisting in select countries)

CDI Ltd
1a Killybrack Mews
Omagh, Co tyrone
N.Ireland. BT797FB
Tel: +44 2882240611
Mob: +44 7961578573

E-mail: sales@conwaydesigninnovation.com

Affordable Washing solutions!