

Introducing Mobile Finishing/Screening at minimal cost! The CDI Model F65 has an onboard Heavy Duty Vibrating Screen. Its on-board Folding conveyors stockpile 3 Grades of Screened material. All components are driven Via an on-board Diesel/Hydraulic Powerunit. It can be fed direct from a Conveyor or from a Digger and is towed to and from site via a Truck or standard Tractor.

Operating Mode



Applications

- Outputs up to 300 Tonnes per hour
- Digger Feed
- Conveyor Feed
- Recycled Aggregates
- Demolition materials / Topsoil
- Hard Rock
- Sand and Gravel.
- Glass
- Coal
- Limestone


Will Screen most materials.
Contact CDI Technical for details.

Standard Features and Specifications

- Machine Weight = Approximately 9Tonne depending on Options.
- On-board 27Kw Diesel/Hydraulic Power Unit.
- Robust Heavy Duty Mobile chassis. (Super single Wheels)
- 4No Hydraulic Jacking Legs
- Full Road lighting and hydraulic brakes
- Screenbox size = 3m x 1.2m
- Top deck screening area = 2750mm (9' 8") x 1220mm (4ft)
- Bottom deck Screening area = 2300mm (7' 6") x 1220mm (4ft)
- Tipping Grid 2.6m x 1.7m
- 900mm Wide Feed Conveyor belt
- 600mm Wide Oversize Discharge belt
- 600mm Wide Mid-Grade Discharge belt
- 800mm Wide Fines Discharge belt
- All Conveyor Discharge height s = 2m.
- Integrated Retractable Drawbar.
- All Conveyors fold for Transport. (Fits in standard shipping container without grid)
- Operating Dimensions = 8.8m Long x 3.7m High x 8.5m Wide.
- Road Transport Dimensions = 8.6m Long x 2.85m High x 2.3m Wide.

CDI Ltd
1A Killybrack Mews
Omagh,
Co Tyrone
BT79 7FB
Northern Ireland

See us Online:
www.cdi-ltd.com
Tel: 0044 2882 240611

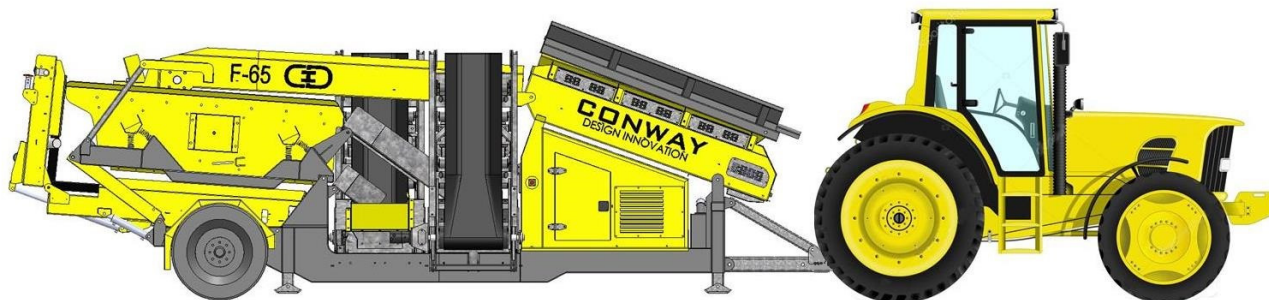

Road Transport

Compact, Heavy Duty and Affordable!